

# How to install your custom boat cover



1. If your boat cover came with a pitch strap, install it now. This typically runs from the front cleat around the top of the tower and back to itself. Pull strap tightly



2. Pull the front of the cover out of the bag. If it was put away properly, the front of the cover was the last part that was stuffed into the storage bag. Now slide the front of the cover over the front of the boat




3. Now that the front of the cover is slipped over the front of the boat, pickup the bag and walk down the passenger side and around the rear of the boat back toward the front on driver's side.



4. Install the two straps on the Passenger side. The front strap will run to the rear, around a bar and back to itself. The back strap will be the exact opposite. Do NOT over-tension this side before tensioning the drivers side or zipper damage will occur!



5. Install the Driver's side straps like the Pass side. This side, you can tension the straps to keep the tension OFF of the zipper. If you are straining to get the zipper started, release the tension from the Pass side and try again. Bring the zipper down to the edge of the boat.

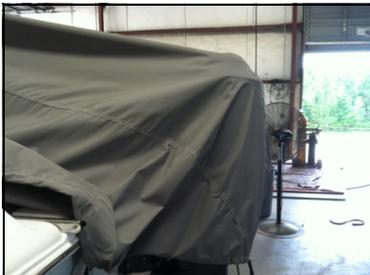

6. From the inside, throw the cover over the side. Once complete, walk around and pull the cover over what you couldn't get from inside. Take the rubber straps and pull them down and attach to the trailer. You can adjust the straps tension at the hook if more/less tension is desired

7. Before you completely pull the zipper down, attach the Velcro strap behind the zipper. This acts as a wear pad between the zipper bottom and the hull. Now pull the zipper completely down

8. Take the rope ratchet and attach it to the looped end. Take the free end and feed it under and around the pawl. Pull tightly. You may need to physically pull the ratchet to the rear and re-tension if more tension is desired.

## How to remove your custom boat cover



1. To release the tension on the ratchet, pull on the loose end of the rope and press the release latch with your thumb. This will allow the ratchet to free wheel. Pull all of the rope out of the ratchet, remove the ratchet from the looped rope and set aside for later



2. Remove all of the rubber straps from the trailer. Take the hook end and slide it back through the webbing that is sewn to the cover. This will minimize the hook from grabbing other hooks, cushions, etc and make installation easier



3. Slide the zipper up to the rail and remove the velcro



4. Pickup the cover and throw it to the inside of the boat. Completely unzip the zipper and remove the straps from the Driver's side. Drag the cover over to the Passenger side and drop the remaining 2 straps



5. Starting from the rear of the boat, take your storage bag and start stuffing your cover into the bag, working from the back to the front. The last part of the cover that goes into the bag should be the very front of the cover. If your cover came with a pitch strap, remove it and put it in the bag on top of the cover. Take the rope ratchet that you removed in step 1 and put it on top of the cover in the bag. Pull the bag closed and stow your cover away.

**\*\*\*Very important. NEVER cover a wet boat or put your cover away wet. You will end up with mildew on your cover or on your boat.\*\*\***